

REX Industrial Floodlight



Product Code	N6050	N6051	N6060	N6061	N6080	N6081
Rating	100W		150W		300W	
Body Colour	Black		Black		Black	
Photocell Fitted	No	Yes	No	Yes	No	Yes
Dimensions	340x257x59mm		374x280x63mm		479x345x73mm	
Weight	3.4Kg		4.1Kg		7.15Kg	
Windage	±2mm		±2mm		±2mm	
IP Rating	IP65		IP65		IP65	
Ambient Temperature	-20°C ~ +40°C		-20°C ~ +40°C		-20°C ~ +40°C	
Body	Die-cast aluminium		Die-cast aluminium		Die-cast aluminium	
Diffuser	Toughened glass		Toughened glass		Toughened glass	
Beam Angle	110°		110°		110°	
Light Output	9000lm		13500lm		27000lm	
Colour Temperature	4000K		4000K		4000K	
Colour Accuracy	70		70		70	
Cable	500mm length, 3x 1.0mm ²		500mm length, 3x 1.0mm ²		500mm length, 3x 1.0mm ²	
Driver	MeanWell		MeanWell		MeanWell	
Input Voltage AC	220V – 240V AC 50Hz		220V – 240V AC 50Hz		220V – 240V AC 50Hz	
Total Circuit Power	100W ±10%		150W ±10%		300W ±10%	
Lumens per Circuit Watt	90lm/W ±10%		90lm/W ±10%		90lm/W ±10%	
Power Factor Correction	0.9		0.9		0.9	


Notes:

LED luminaires must not be on the same circuit as other luminaire types, eg metal halide.



REX Industrial Floodlight

Illumination / Distance Curve 100W

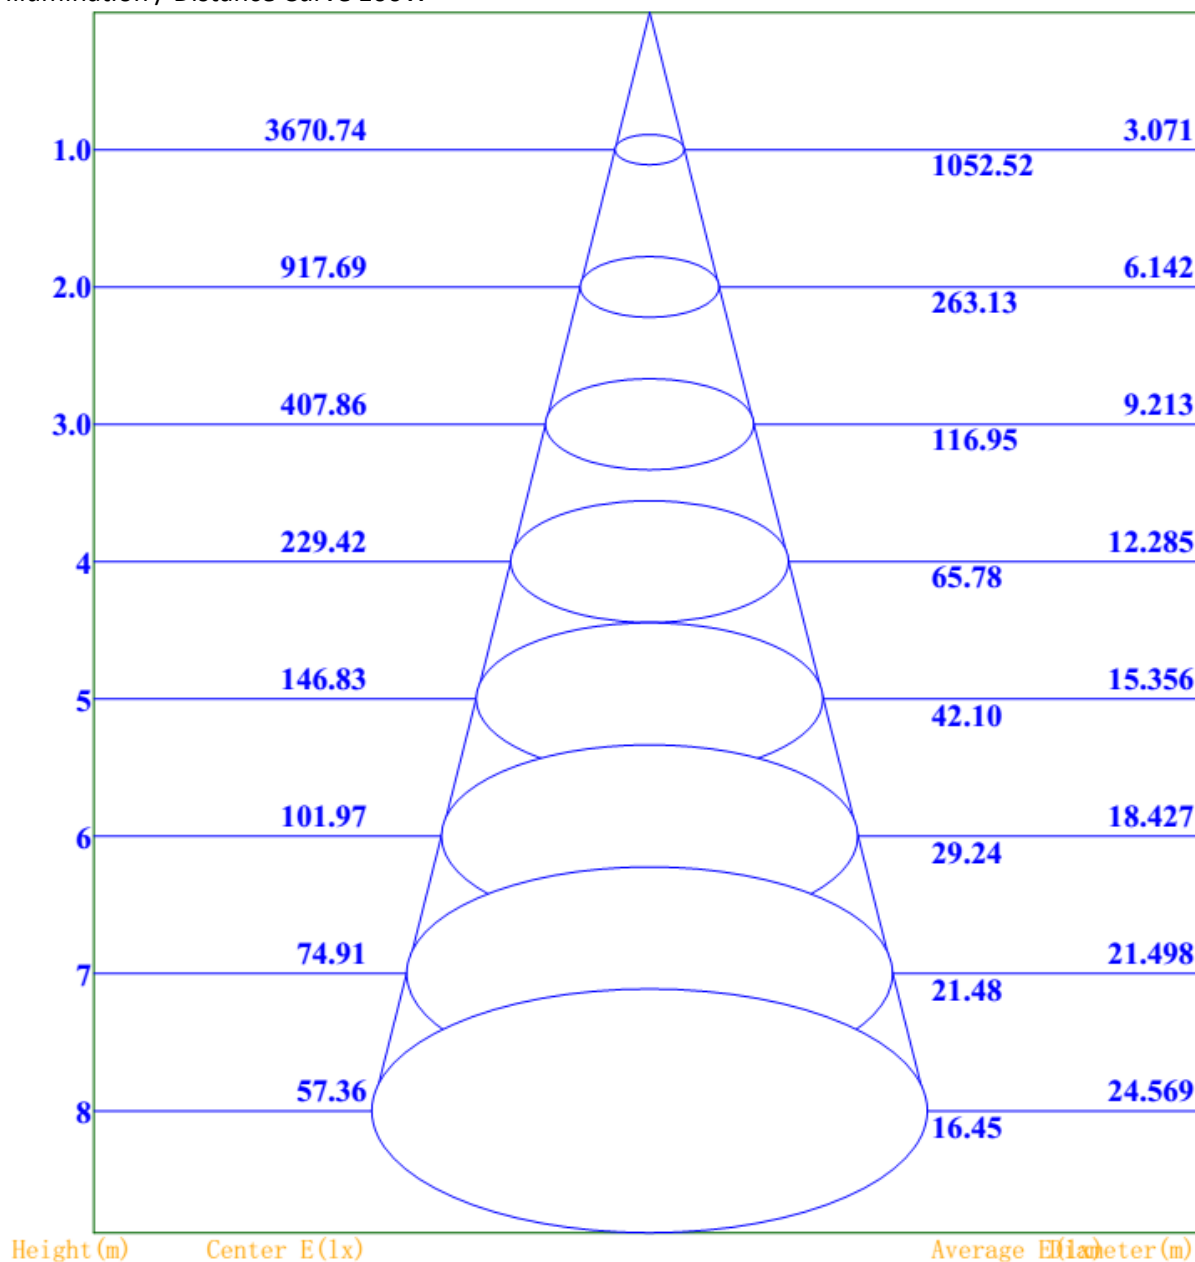


Beam Angle: 113.9



REX Industrial Floodlight

Illumination / Distance Curve 150W

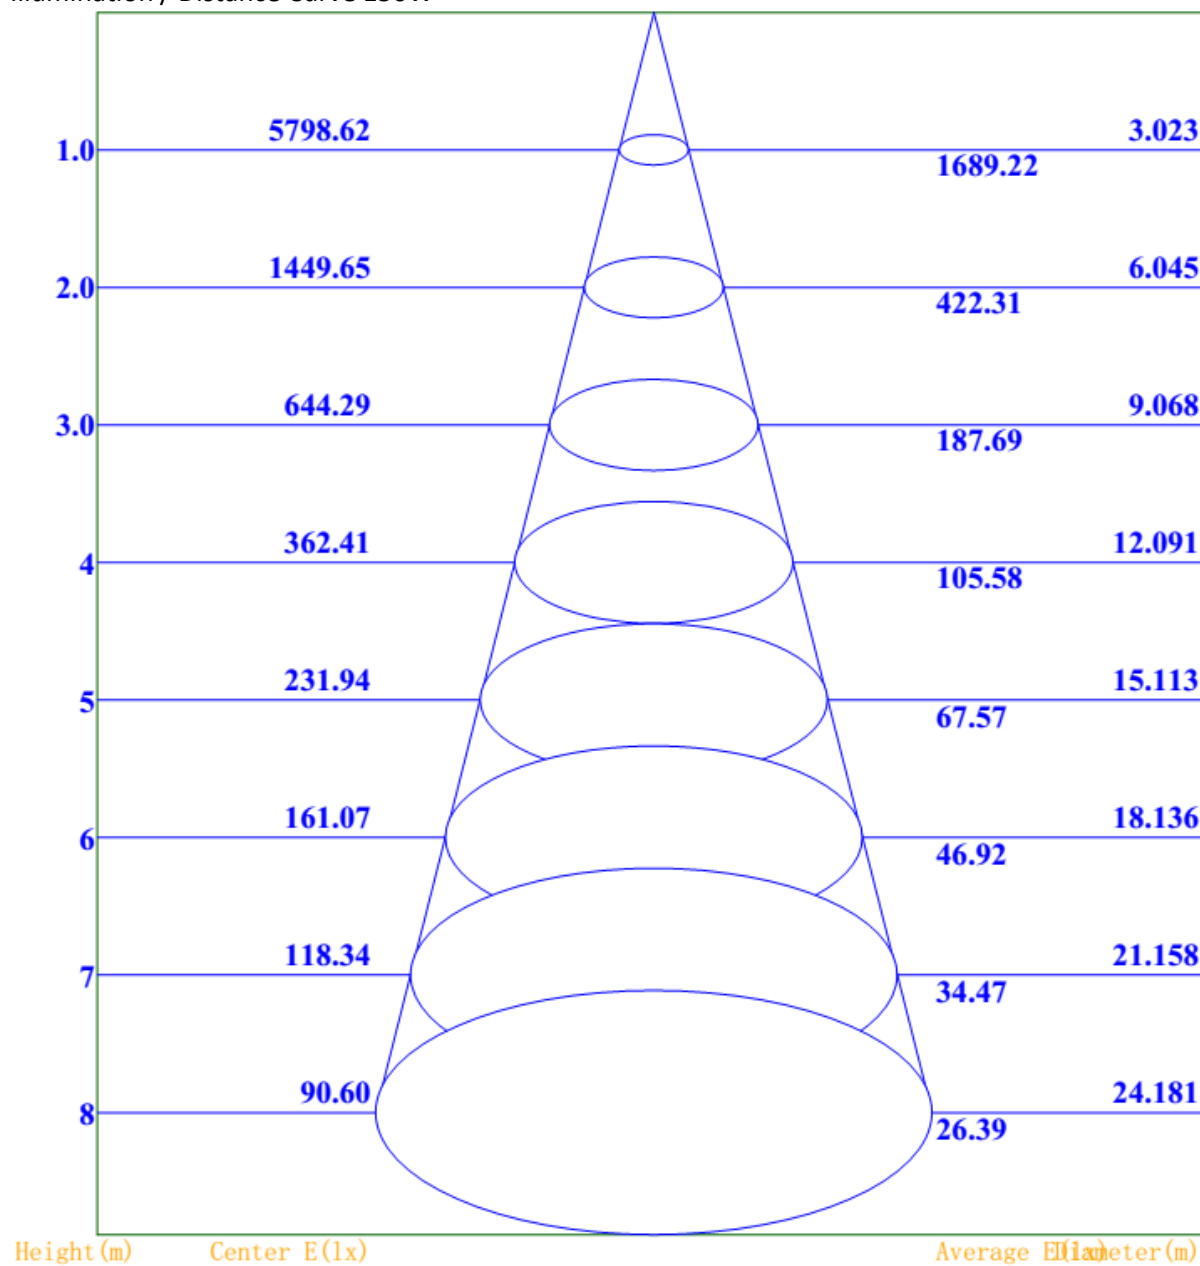


Beam Angle: 113.0



REX Industrial Floodlight

Illumination / Distance Curve 300W

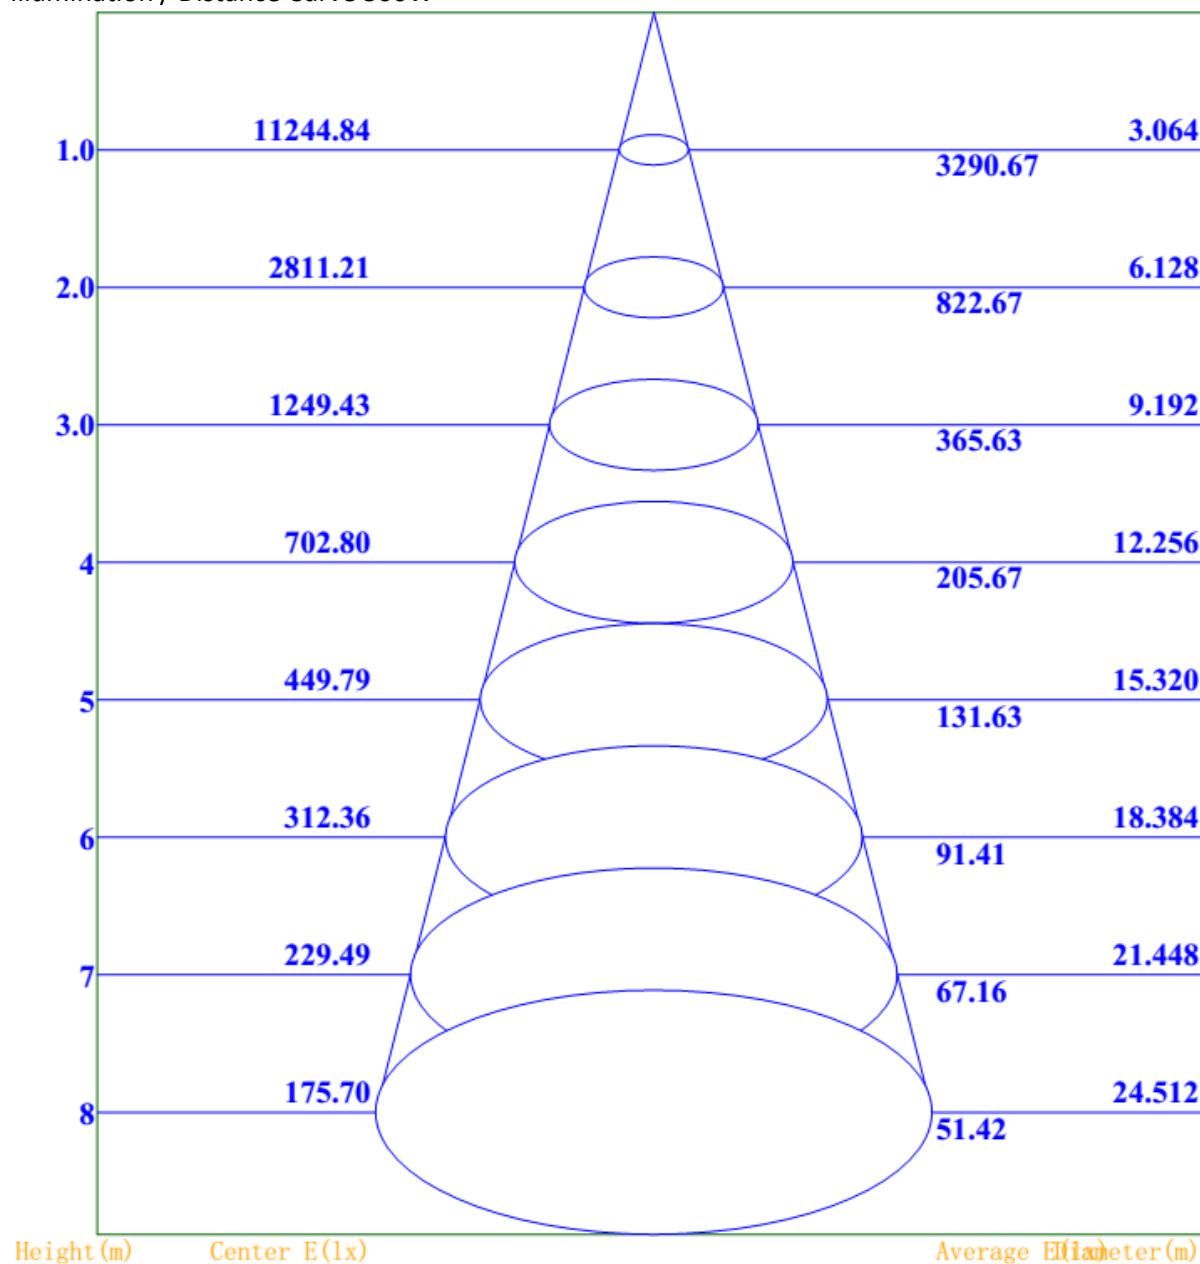

Beam Angle: 113.7