

LED IP44 TP(a) PANEL



PRODUCT DESCRIPTION

LED panel with TP(a) rated diffuser in two sizes (600 x 600 and 600 x 1200), in standard mains and emergency versions with dimming versions also available. Due to the driver design it is exceptionally easy to install.

KEY FEATURES



- For recessed installation in 15-24mm exposed T ceilings
- Also suitable for surface or suspended installation with use of the accessories listed (600x600 only)
- Side-lit design with LEDs housed in the frame
- Polycarbonate TP(a) rated opal diffuser
- IP44 to front
- Spring-clamp, loop-in/out terminals for quick installation

TECHNICAL DETAILS

- 600x600 - 34W (actual), 3410 lumens, 100 luminaire lumens / circuit watt
 - 1200x600 - 55W (actual), 6370 lumens, 116 luminaire lumens / circuit watt
 - CRI >80
 - CCT 4000K
 - High specification driver with <8% flicker
 - Available in two sizes, 600 x 600 and 600 x 1200
 - Emergency versions available as listed.
 - Dimming versions available.
 - Class I (emergency versions), class II (standard versions)
 - 5 year warranty
-

Part number	Description
LPAN34TPA840	600X600 3400LM 34W IP44 TPA LED PANEL 840
LPAN34TPA840E3	600X600 3400LM 34W IP44 TPA LED PANEL 840 E3
LPAN63TPA840	1200X600 6370LM 55W IP44 TPA LED PANEL 840
LPAN63TPA840E3	1200X600 6370LM 55W IP44 TPA LED PANEL 840 E3
LEDWIREKIT1	WIRE SUSPENSION KIT FOR 600X600 LED PANEL
LEDSURFACEKIT1	SURFACE MOUNTING KIT FOR 600X600 LED PANEL

PHOTOMETRIC DATA

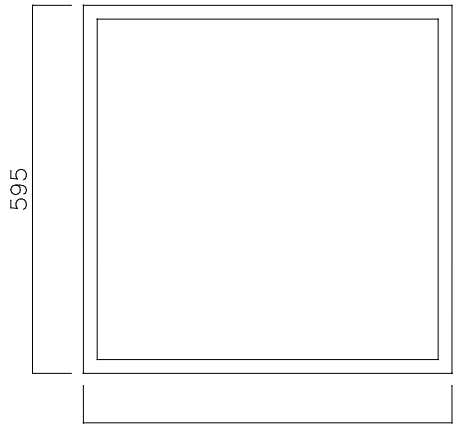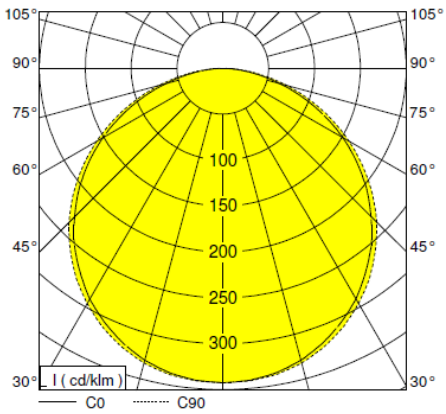

34W = 595
55W = 1195

Date completed by manufacturer: 14th July 2017