

LED TRIPLE PANEL**PRODUCT DESCRIPTION**

LED 600 x 600 triple-panel in standard mains, emergency and dimming versions. With its attractive and distinctive design this product presents customers with the opportunity to install something other than a standard flat panel.

KEY FEATURES



- For recessed installation in 15-24mm exposed T ceilings
- Back-lit design
- Opal polycarbonate diffuser panels in a steel body
- Supplied complete with driver

TECHNICAL DETAILS

- 33W (actual), 2,800 lumens, 85 luminaire lumens / circuit watt
 - CRI >80
 - CCT 5000K
 - Dimming versions available as listed below
 - Class I (emergency versions), class II (standard versions)
 - 5 year warranty
-

Part number	Description
LMOD2/66/850/E3	595X595 2800LM 32W LED 3 PANEL 850 E3
LMOD2/66/850/DIM	595X595 2800LM 32W LED 3 PANEL 850 DIM
LMOD2/66/850/E3/DIM	595X595 2800LM 32W LED 3 PANEL 850 DIME3

PHOTOMETRIC DATA

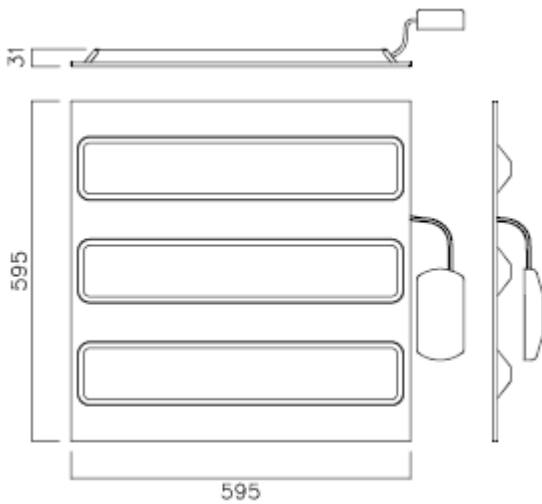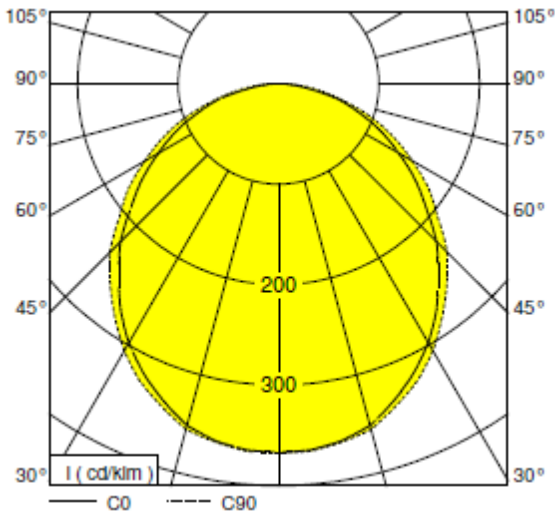

Date completed by manufacturer: 29 September 2016