



DECORATIVE INDOOR BULKHEAD

- IP54 rated ideal for bathrooms, utility and decorative installations
- Easy quick installation - Wall or Ceiling mounted
- Suitable for most residential and commercial applications including bathroom/toilets, hallways, corridors and functional utility
- Supplied with both White and Chrome interchangeable bezels
- Piano key push fit terminal block

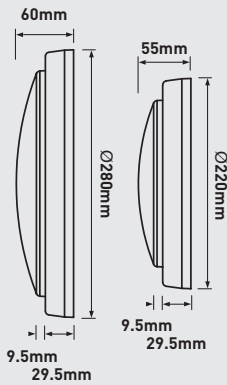

| CAT NO. | SIZE | LUMINAIRE LUMENS | WATTAGE | EFFICACY Llm/W |
|----------|--------|------------------|---------|----------------|
| EBH22S40 | Ø220mm | 1300 | 14W | 93 |
| EBH28S40 | Ø280mm | 1650 | 17W | 97 |

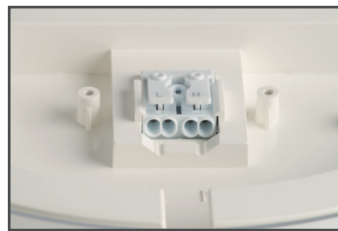

Loop in / loop out push fit terminal


| | LENGTH/DIA (mm) | WIDTH (mm) | HEIGHT/DEPTH (mm) | WEIGHT (kg) | L FIXING CENTRES (mm) | W FIXING CENTRES (mm) | CEILING CUTOUT (mm) | LUMINAIRE LUMENS (Llm) | LUMINAIRE WATTAGE (W) | EFFICACY (Llm/W) | CCT (K) | CRI | UGR | IP RATED | IK RATED | GLOW WIRE (°C) | RAL COLOUR | TEMP RANGE (°C) | RATED LIFE (HR) | AMBIENT TEMP. RATED LIFE (°C) | L AT RATED LIFE | B AT RATED LIFE | VOLTAGE RANGE | FREQUENCY | EMERGENCY PACK CODE | WARRANTY (YEARS) |
|----------|-----------------|------------|-------------------|-------------|-----------------------|-----------------------|---------------------|------------------------|-----------------------|------------------|---------|-----|-----|----------|----------|----------------|------------|-----------------|-----------------|-------------------------------|-----------------|-----------------|---------------|-----------|---------------------|------------------|
| EBH22S40 | 220 | 55 | 29.5 | 0.5 | N/A | N/A | N/A | 1300 | 14 | 93 | 4000 | >80 | ≤24 | IP54 | IK08 | N/A | 9016 | -20+40 | 25,000 | 25 | 70 | 10 | 220-240V | 50hz | N/A | 3 |
| EBH28S40 | 280 | 60 | 29.5 | 0.8 | N/A | N/A | N/A | 1650 | 17 | 97 | 4000 | >80 | ≤24 | IP54 | IK08 | N/A | 9016 | -20+40 | 25,000 | 25 | 70 | 10 | 220-240V | 50hz | N/A | 3 |

EHB22S40

LUMINAIRE PERFORMANCE

Light Output Ratio: 99.89%
 Luminaire Efficacy: 92.75 lm/W
 Light Distribution: A41 ↓97.9% ↑2.1%
 CIE Flux Codes: 44 74 92 98 100
 UGR 4H 8H (20%, 50%, 26.8 / 26.9
 70%)C0 / C90:

LUMINOUS INTENSITY

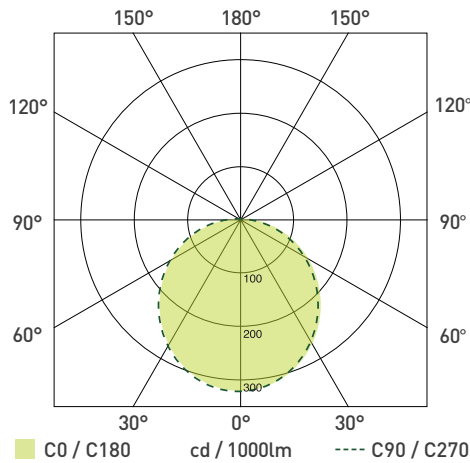


EHB28S40

LUMINAIRE PERFORMANCE

Light Output Ratio: 100%
 Luminaire Efficacy: 97.06 lm/W
 Light Distribution: A41 ↓97.9% ↑2.1%
 CIE Flux Codes: 44 75 92 98 100
 UGR 4H 8H (20%, 50%, 25.2 / 25.2
 70%)C0 / C90:

LUMINOUS INTENSITY

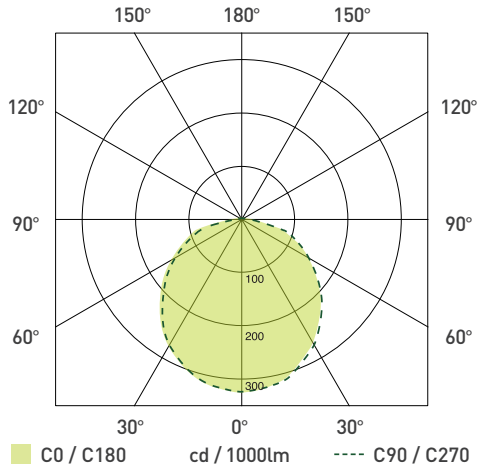

LUCECO

This luminaire contains built-in LED lamps.

} LED

A++

A+

A

B

C

D

E

The lamps cannot be changed in the luminaire.

874/2012

STANDARDS

| | |
|-------------------|---|
| EN 60598-1 | Luminaires - General requirements |
| EN 60598-2-1 | Luminaires - Fixed |
| EN 60598-2-2 | Luminaires - Recessed |
| EN 60598-2-22 | Luminaires - Emergency |
| EN 61347-1 | Lamp controlgear - Part 1: General and safety requirements |
| EN 61347-2-13 | Lamp controlgear - Part 2-13 : Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules |
| EN 55015 | Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment |
| EN 61547 | Equipment for general lighting purposes - EMC immunity requirements |
| EN 61000-3-2 | Electromagnetic compatibility (EMC) - Part 3-2: Limits - for harmonic current emissions |
| EN 62471 | Photobiological safety of lamps and lamp systems |
| 2002/96/EC | Waste Electrical & Electronic Equipment (WEEE) |
| 2011/65/EU | Restriction of the use of certain Hazardous Substances in EEE (RoHS) |
| (EC) No 1907/2006 | The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH) |

RoHS