



The Venture **LED LoBay** offers up to 65% energy saving compared to traditional HID products. The product comes with a clear diffuser as standard and is suitable mounting heights up to 8 metres.



50,000
Hours




5
Years
Warranty



Photometric Data

Part Code	Lumens	LPW	Rated Life (Hrs)	L80 B50 @ Ta Max (Hrs)	CCT (K)	CRI (Ra)	Beam (°)
IND123-REX	11,895	109	50,000	>50,000	4000	>80	Wide
IND124-REX	16,220	112	50,000	>50,000	4000	>80	Wide
IND078-REX	21,230	118	50,000	>50,000	4000	>80	Wide

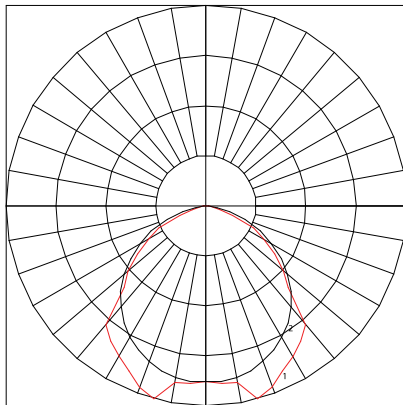

1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Vertical Plane Through Horizontal Angles (90 - 270)

Accessories

ACS018-REX	Lowbay Trunking Mounted Brackets
DFS001-REX	Lowbay Opal Diffuser

Environmental Data

Max. Ambient (°C)	40
Min. Ambient (°C)	-25
IP Rating	IP20

Electrical Data


Part Code	Input (W)	Input (V) ±10%	Input (Hz)	Input (A)	Electrical Class	Inrush (A) (Ipeak)	No. per C16	Power Factor	THD (%)
IND123-REX	109	220-240	50/60	0.61	1	60	15	>0.9	<15
IND124-REX	144	220-240	50/60	0.8	1	60	15	>0.9	<15
IND078-REX	179	220-240	50/60	1.0	1	100	10	>0.9	<15

Physical Data

Part Code	Lens Type	Case Material	Reflector	Dimensions (mm)	Weight (kg)	Connector Type Input
IND123-REX	Clear Polycarbonate	Steel	MIRO 4	600mm x 400mm x 57mm	4.3	2m Lead + Socket
IND124-REX	Clear Polycarbonate	Steel	MIRO 4	600mm x 400mm x 57mm	4.3	2m Lead + Socket
IND078-REX	Clear Polycarbonate	Steel	MIRO 4	600mm x 540mm x 57mm	4.5	2m Lead + Socket



IND123-REX
IND124-REX

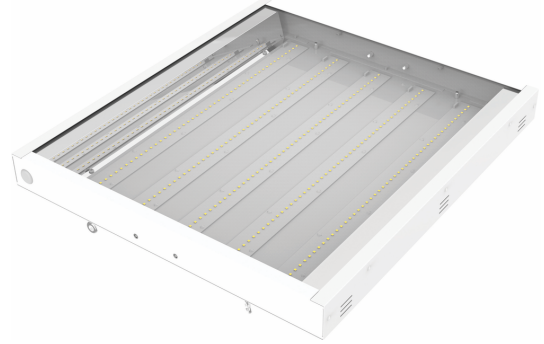

IND078-REX