

Outdoor GeoLux 13W 4000K 620lm IP65*Partcode: ILDEA021 / Page: 1*

The Integral LED Outdoor range offers style and substance, with contemporary designs and hardwearing, weatherproof aluminium construction. This range of modern luminaires creates the perfect accent lighting for exterior walls in residential and commercial environments with all the low-energy and long-life benefits of LED.

The Geolux is an attractive elliptical wall light with a polycarbonate diffuser that gives a gentle wash of light to your wall. The dark grey, powder coated finish is both beautiful and rugged.

Product Details

Partcode: ILDEA021

Check Code: 529510

Range Name: Outdoor

Product Type: Bulkheads-Ceiling-Wall Lights

Warranty: 3 Years

CE / RoHS: Yes

Physical Data

Optic: Polycarbonate diffuser

Material: Die cast aluminium body with powder coated finish

Physical Data

Width: 169mm

Depth: 55mm

Diameter: 219mm

Weight (Unpackaged Single Unit): 750g

Luminaire Fixing: Wall Mounted

Electrical Data

Voltage Range: 220-240V

Power Consumption: 13.0 Watts

Driver included: Yes

Electric Current: AC

Ampage: 300.00mA

Frequency Range: 50/60 Hz

Power Factor: ≥ 0.80

Dimming: Non-dimmable

LVD Certified: Yes

EN: EN-60598

Light Data

Lumens: 620lm

Lumens per Watt: 48.0lm/W

Beam Angle: 120°

Correlated Colour Temperature (CCT): 4,000k

Colour Temperature: Cool White


Colour Rendering Index (CRI): ≥ 80

LED Type: Surface mounted device (SMD)

Instant on - Less than 1 second: Yes

Switching Cycles: $>12,500$ X

Environmental

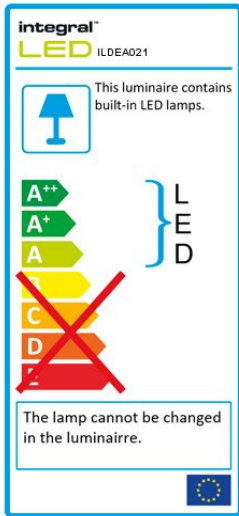

Lowest Operating Temperature: -20 degrees
Maximum Operating Temperature: 65 degrees
IP (Ingress Protection) Rating: IP65
Hg 0% (Mercury Free): Yes

Packaging

EAN Barcode (unit of 1): 5055788233176
Packaged Weight (Unit of 1): 850g
Length (unit of 1): 180mm
Width (unit of 1): 230mm
Depth (unit of 1): 65mm

Outer packaging info available on website

Product data last updated on: Tuesday, July 18, 2017 - 12:13